


DOUBLE-SIDED TAPE



EAN code: 5907588403146 item no.: 0040065 type 6mm/5m
 EAN code: 5907588403153 item no.: 0040066 type 9mm/5m
 EAN code: 5907588403160 item no.: 0040067 type 12mm/5m
 EAN code: 5907588403177 item no.: 0040068 type 15mm/5m
 EAN code: 5907588403184 item no.: 0040069 type 19mm/5m
 EAN code: 5907588420037 item no.: 0040060 type 6mm/10m
 EAN code: 5907588410038 item no.: 0040061 type 9mm/10m
 EAN code: 5907588400039 item no.: 0040062 type 12mm/10m
 EAN code: 5907588460040 item no.: 0040063 type 15mm/10m
 EAN code: 5907588400619 item no.: 0040064 type 19mm/10m

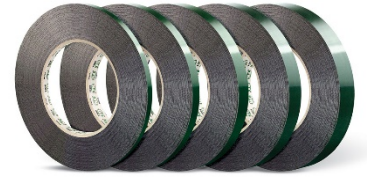

PROPERTIES

Used for fixing skirting boards, decorative profiles, etc. in cars. Resistant to salt, water, UV rays and temperature. It is characterized by high shear resistance.



COLOUR

 dark green



METHOD OF USE

The tape is designed for use in automotive and industrial painting. The surface to which the tape is to be applied should be dry, dust-free and degreased.



PHYSICAL PROPERTIES

| | |
|--------------------------|-----------------------|
| carrier: | polyethylene foam |
| binder : | acrylic solvent based |
| total thickness : | 935 µm |
| media thickness : | 860 µm |
| total weight: | 200 g/m ² |
| backing weight : | 76 g/m ² |
| binder weight : | 124 g/m ² |
| adhesion to steel : | 17 N/25 mm |
| static shear (hours) : | >168 (1 kg) |
| tensile strength: | 15 N/10 cm |
| total elongation : | 400 % |
| temperature resistance : | -20 - +100°C |



STORAGE CONDITIONS



Protect the product from excessive heat and cold. Avoid direct exposure to sunlight. Store in a dry place.



SHELF LIFE

Stored in a dry place at 18 - 21°C, the tape retains its properties for 12 months.



OTHER INFORMATION

All technical data are approximate values. We advise you to test the material to ensure suitability for your specific application. The producer reserves the right to improve the product and change the technical conditions with the possibility of making changes inside the specification.